

# USER MANUAL

Model LYCR-3500 Receiver

## FEATURES:

- No wiring, easy operation, just plug and use.
- **67 million codes, self program function receiver.**
- **Receiver has 6 memory settings, no memory loss forever.**
- Red LED indicator for POWER ON and PROGRAMMING SETTINGS.
- Transmitter with 16 receivers control on paged channel.

## INSTALLATION:

### **Controller (Receiver)**

- Just plug-in receiver into wall outlet
- Indicator on receiver should light on.
- Connect lamp plug into receiver

### **Remote control (Transmitter)**

- Remote control till 30M in open area

## OPERATION :

### **ON/OFF RECEIVER**

- \* Press transmitter button 'ON' to switch on.
- \* Press transmitter button 'OFF' to switch off.

## HOW TO LINK CODE:

- \* To start, program your transmitter with the receiver.
- \* Receiver plugged on power
- \* Bring the transmitter near the receiver, push the self program button on receiver once
- \* Receiver led will blink slowly, press transmitter selected "ON" button
- \* Receiver connected lamp will blink twice, code is confirmed and led stops blinking.
- \* Remember the transmitter button you selected for the programmed receiver.
- \* Transmitter and Receiver codes are auto programmed.


## TO CHANGE OR DELETE CODE :

### **INDIVIDUAL DELETE -**

- \* Push the self program button once, led will blink slowly
- \* Press selected "OFF" button on transmitter, programmed memory is deleted.
- \* Receiver connected lamp will blink twice for confirmation.
- \* Repeat step for re-setting

### **ALL MEMORY DELETE -**

- \* Push the self program button till the LED blinking continuously
- \* Release and push again once.

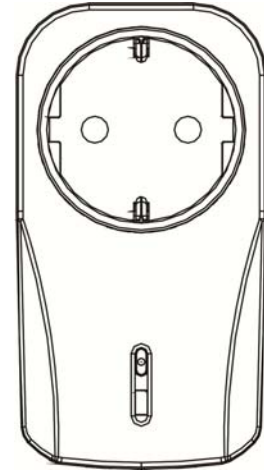

\* Receiver connected lamp will blink twice for confirmation.

\* ALL PROGRAMMED MEMORY WILL BE DELETED FROM RECEIVER

### **RECEIVER HAS 6 MEMORY SETTINGS :**

\* Self program function RECEIVER has 6 memory settings.

\* It can be programmed as to your requirement with special effect. It can be programmed to switch ON at one time individually or programmed with different combinations switching.

\* This means one receiver can be programmed into max. 6 different combination.

Example :            If there is 3 receivers, [ receiver 1 = lamp shade ,   receiver 2 = night light ,   receiver 3 = fan ]

Receiver 1,2,3 can be control individually with transmitter button 1,2,3

Receiver 1,3 can be programmed with transmitter button 4, (lamp shade and fan ON/OFF at same time)

(Above settings 'Receiver 1' and '3' takes up 2 programmed memory and 'Receiver 2' only 1 program memory, different combinations and settings can be teamed up and control from transmitter )

### **SPECIFICATION**

#### **RECEIVER**

Frequency: 433.92MHz

Power: 240V +/-10%, 50Hz

3500 watt / 230VAC

#### **FAULT FINDING**

No activation :     Check battery polarity or running out battery

                          Check code program successful.

#### **CAUTION :**

Do not place two receivers near each other, the distance should be above 1 meter.

#### **Warning!**

DO NOT OVERLOAD

Do not plug or use in damp places like patios, cellar, flammable liquid, solvents, paints etc...