

USER MANUAL

MODEL: PCR-2300

RF remote power extension cable



FEATURE:

- Self program, 67 million codes.
- ON/OFF function.
- Suitable for home electronic appliances (such as TV, DVD, Audio and lamp light) used in a close area which wall socket quantity is limited or in the down corner (fig. 1)
- One touch button to switch off all applied electronic appliances in standby mode.
- Multi-standby power consumption killer. Save standby electrical energy than 4 traditional plug in.
- 4 sockets switched on-off simultaneously.
- 6 memories for different controllers to remote control.
- Green LED indication.
- Compatible to all ARC transmitters.

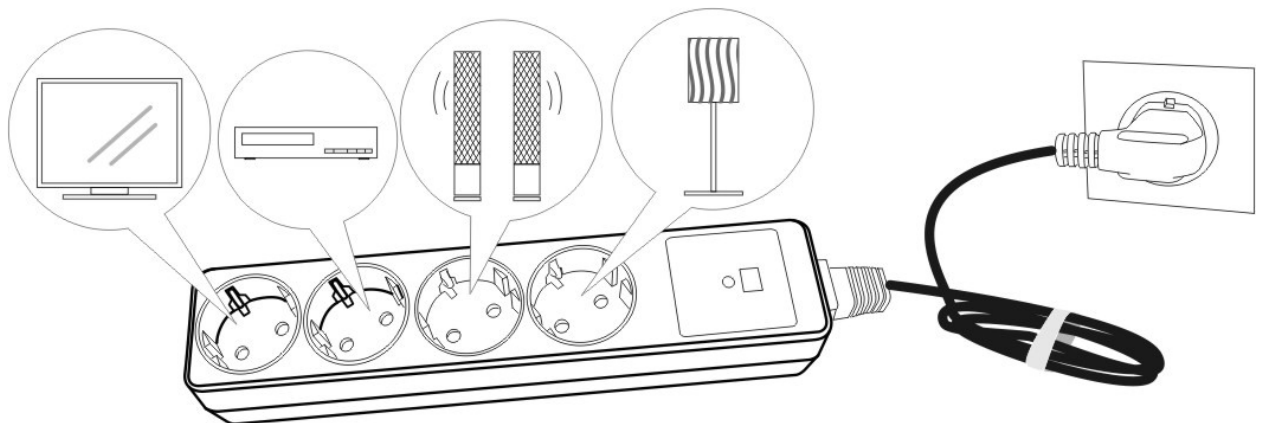


Fig.1

INSTALLATION:

- Plug PCR-2300 into wall socket, green LED indicator lights on.
- Set (learn) code of PCR-2300 with transmitter (see below "HOW TO SET / DELETE CODE WITH ARC TRANSMITTER).
- Plug electronic appliances onto PCR-2300 and use.

HOW TO SET / DELETE CODE WITH ARC TRANSMITTER:

SET (LEARN) CODE: (Fig. 2)

- Plug PCR-2300 into wall socket.
- Bring the transmitter near the receiver, push the self program button on receiver once.
- Receiver LED will blink slowly, press transmitter selected "ON" button.
- Receiver LED will blink twice, code is confirmed and LED stops blinking.

(Remember the transmitter button you selected for the programmed receiver if the transmitter has more than 1 set on/off buttons.)

- Transmitter and receiver code is auto programmed.
- Same procedure to link with ARC code switch transmitter.

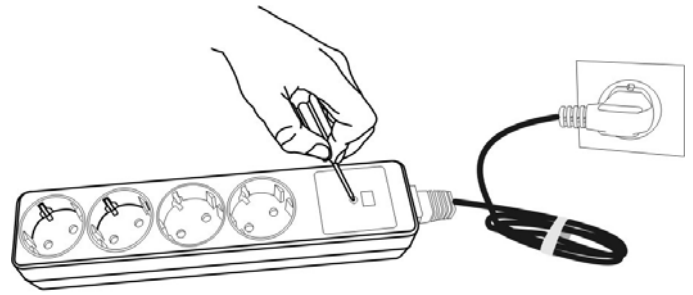


Fig.2



DELETE CODE:

Delete individually – (Fig. 3)

- Push the self program button once, LED will blink slowly.
- Press selected “OFF” button on transmitter, selected programmed memory is deleted.
- Receiver LED will blink twice for confirmation.
- Repeat step for re-setting.

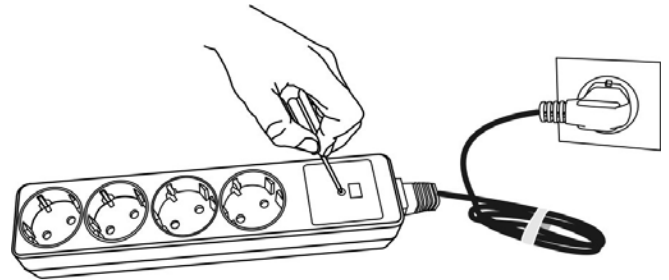



Fig.3



Delete ALL memories – (Fig. 4)

- Push the self program button till LED blinks continuously.
- Release and push again once.
- Receiver LED will blink twice for confirmation.
- All programmed memories will be deleted form receiver.

Fig.4

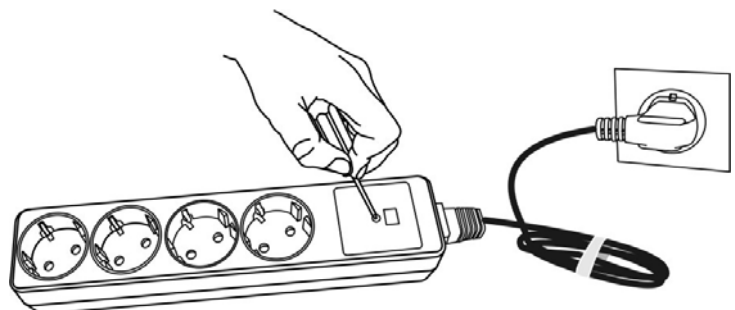

OPERATION:

On transmitter:

- Switch “ON” function – press “ON” button once to switch on PCR-2300.

(To switch on each electronic appliance, such like TV, DVD player, Audio system, should use each corresponded remote separately)

- Switch “OFF” function – press “OFF” button once to switch off PCR-2300. All applied electronic appliances will be switched off at the same time.

SPECIFICATION:

Frequency: 433.92 MHz

Power: 230V~+/-10%, 50Hz

Output: 4 sockets TOTAL 2300W resistive load.

Transmission distance: 30 meters (open field)

WARNING!


- Do not overload.
- Do not place two PCR-2300 receivers near each other, the distance should be above 3 meters.
- Do not use in damp places like patios, cellar, flammable liquid, solvents, paints etc.
- Do not plug in line.
- Do not cover.
- Plug out to disconnect from power supply.

WARNHINWEISE!

- Nicht hintereinander stecken.
- Nicht abgedeckt betreiben.
- Spannungsfrei nur bei gezogenem Stecker.

**** Do not plug in line. (Nicht hintereinander stecken.)**

PCR-2300+PCR-2300

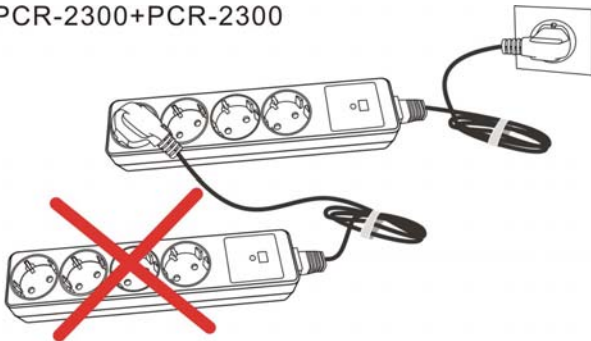

PCR-2300+ normal power cable

