


# MINIATURE DIMMER MODULE RECEIVER

M W M R - 2 5 0



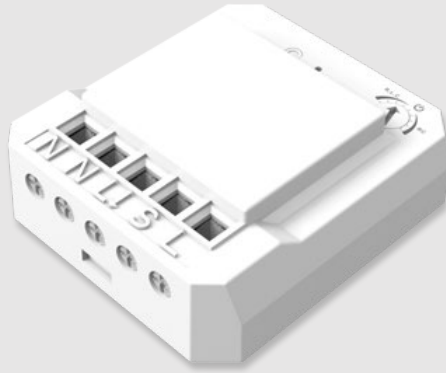

# MINIATURE DIMMER MODULE RECEIVER ROCKER SWITCH

SIMPLE BUT POWERFUL.

Remotely controlled 250W universal Mini Dimmer Wall Module is designed to control existing dimmable LED, dimmable energy saving lamp, incandescent lamp, 230V~ halogen lamp and 12V halogen lamp with inductive transformer or electronic transformer.

## FEATURES

- Compatible to L and M series.
- Operating mode of Trailing Edge or Leading Edge.
- Compatible with existing rocker switch for On / Off / Dimmer function.
- 2-way switching.
- Minimum brightness setup for different kinds of dimmer loads.
- 32 memories, first in first out storage maintain.
- Scene status memory, create your desired atmosphere.
- Fits into standard wall box.

## TECHNICAL DATA

- Input Rating: 230V~50Hz
- Output Rating: 250W
- Radio Frequency: 433.92MHz
- Power Consumption: <1W
- Environment Temperature: 0-40 °C
- Range: Up to 50 Meter range (Depends on building materials).

## SPECIFICATION

- Dimension (W x H x D): 48 x 48 x 25 mm
- Weight: 20g

